

How to schedule:


W x H AAP 200
width height model thickness

Performance Options

Thickness: 2" (51) 4" (102)
Fill Material: Fiberglass (standard) Mineral Wool
Fill Protection: None (standard) Polymer Film

Construction Options

Materials: Galvanized Steel 304 Stainless Steel
Exterior Sheet: 22 Gauge Perforated
Stiffeners: 12" (305) on center 16" (406) on center
Finish: Mill Polyester Powder High Performance Fluoropolymer Special

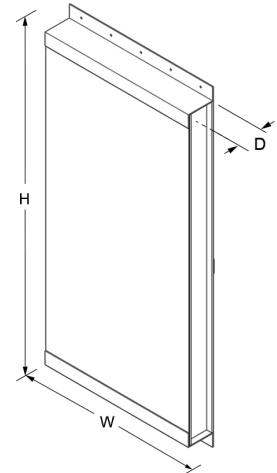

Model	Absorption Coefficients (α)						
	2 125	3 250	4 500	5 1K	6 2K	7 4K	NRC
AAP - 200 2" (51)	.22	.55	.99	1.06	1.04	1.01	(0.90)
AAP - 400 4" (102)	.78	1.02	1.18	1.12	1.07	1.05	(1.10)

Performance Notes

- Information is subject to change without notice or obligation.
- Dimensions in parenthesis () are millimeters.
- Laboratory sound absorption test data in accordance with ASTM C423 conducted in NVLAP accredited facility (Lab Code #100227-0).
- Noise Reduction Coefficient (NRC) is the average of the sound absorption coefficients for 250, 500, 1000, and 2000 Hz rounded to the nearest 0.05.
- Maximum single section size 30" x 144" (762 x 3658).