



UL 1503

HORIZONTAL MOUNT DAMPERS IN NON-CONCRETE BARRIERS FOR FIRE AND COMBINATION FIRE/SMOKE DAMPERS

Pottorff now offers Fire and Combination Fire/Smoke Dampers that are UL approved for horizontal installations at the top or bottom of gypsum and steel stud shafts.

WITH THIS INSTALLATION, DESIGN PROFESSIONALS NOW HAVE:

- Increased flexibility
- More usable space
- Reduced installation time

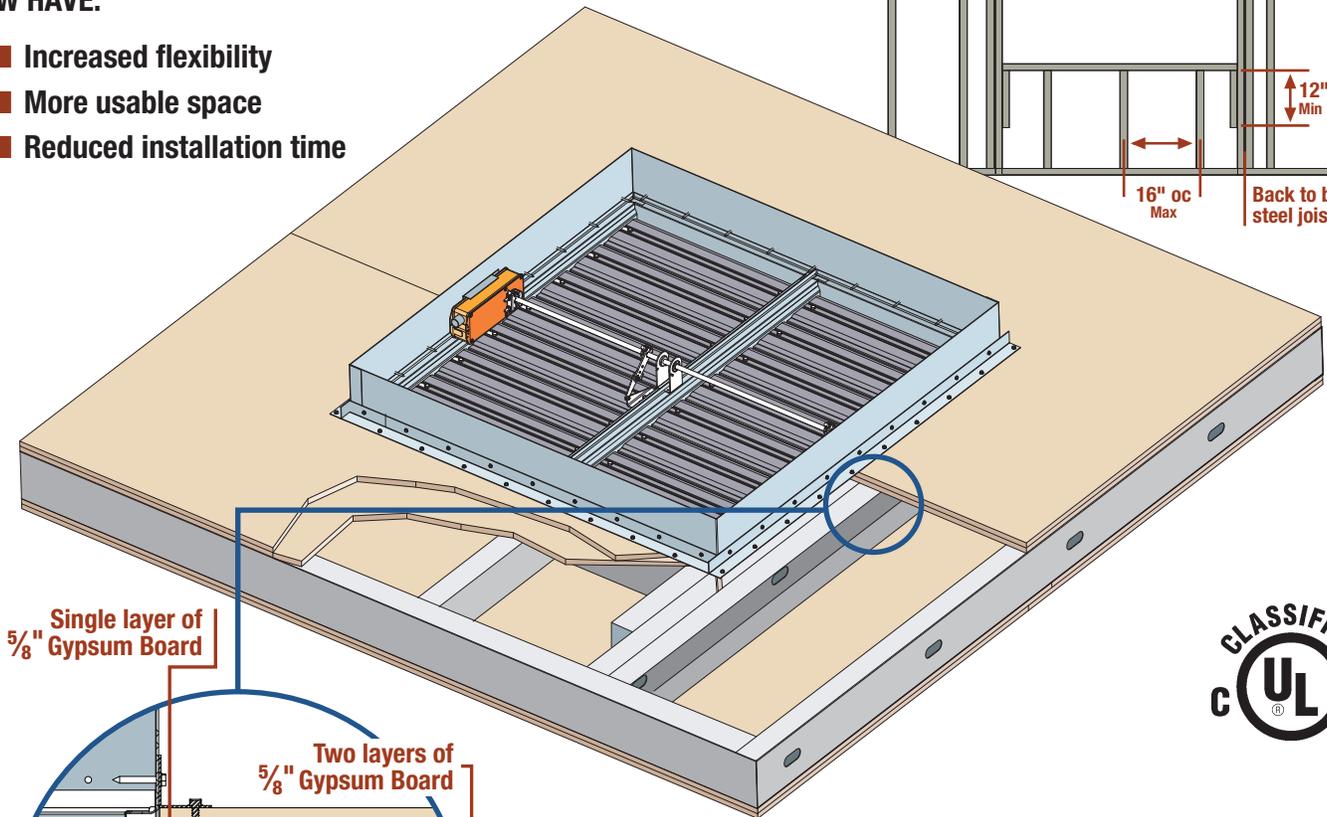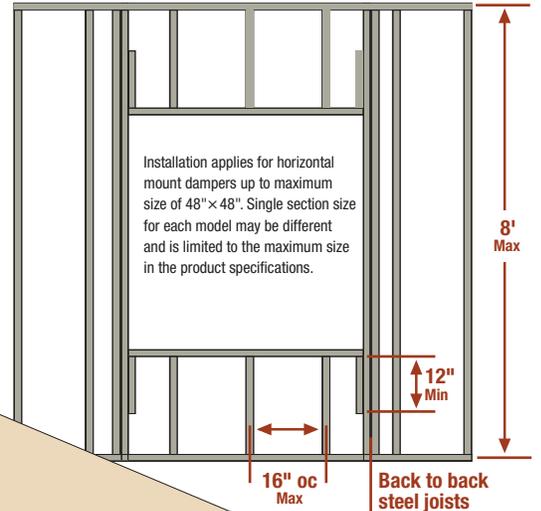

UL Design 1503 is a 2-hour fire rated, non-load bearing, horizontal barrier made from steel studs and gypsum board. It offers an elegant solution to the complex task that specifying engineers face when they need to protect duct penetrations at the top and bottom of fire-rated building shafts. All of our horizontal FD, FSD, CFS and VFD models can be installed with the UL 1503 Design. Refer to UL Design No. 1503 and Pottorff installation instructions for additional details.

POTTORFF®

For info visit www.pottorff.com