

## Application

The HT-401 equipment screen incorporates a horizontal step-blade to match common building cladding systems and screen equipment from line-of-sight. The HT-401 is available in a wide array of finishes including custom color matching.

## Standard Construction

**Material:** Mill finish 6063-T5 extruded aluminum.

**Frame:** 4" × 1½" × 0.081" thick (102 × 38 × 2) angle.

**Blades:** 0.081" (2) thick airfoil tube style.

**Mullion:** Concealed.

**Minimum Size:** 12" × 12" (305 × 305).


**Maximum Size:** Single section: 60" × 144" (1524 × 3658).  
 144" × 60" (3658 × 1524).  
 Multiple section: Unlimited

## Options

- Factory finish:
  - High Performance Fluoropolymer - 100% resin Newlar®/70% resin Kynar®
  - Baked Enamel
  - Clear or Color Anodized, Class 1
  - Integral Color Anodize
  - Prime Coat
- Welded construction.
- Hinged frame.

## Ratings

**Free Area:** [48" × 48" (1222 × 1222) unit]: 9.6 ft<sup>2</sup> (0.89 m<sup>2</sup>)  
 60.0%

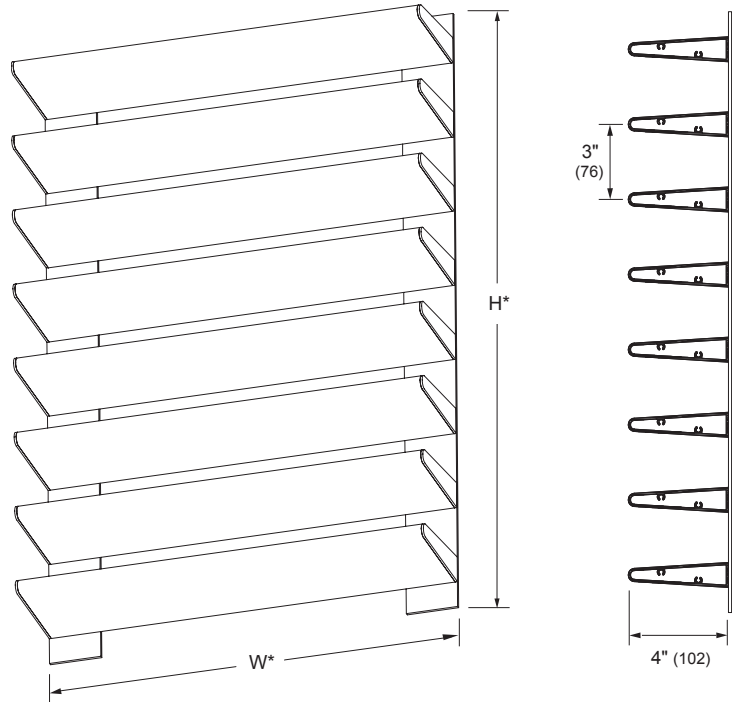


Model **HT-401**

(standard)


\*Dimensions furnished  
 approximately 1/2" (13) undersize.

Vertical Section



Vertical Mullion

(standard)



Horizontal Mullion

(standard)