

## Application

The VT-250 equipment screen incorporates a vertical "T" blade to match common building cladding systems and screen equipment from line-of-sight. The VT-250 is available in a wide array of finishes including custom color matching.

## Standard Construction

**Material:** Mill finish 6063-T5 extruded aluminum.

**Frame:** 2" × 1 1/2" × 0.081" thick (51 × 38 × 2) angle.

**Blades:** 0.081" (2) thick vertical cladding T-style.

**Mullion:** Visible.

**Minimum Size:** 12" × 12" (305 × 305)


**Maximum Size:** Single section: 72" × 144" (1829 × 3658)  
 144" × 72" (3658 × 1829)  
 Multiple section: Unlimited

## Options

- Factory finish:
  - High Performance Fluoropolymer - 100% resin Newlar®/ 70% resin Kynar®
  - Baked Enamel
  - Clear Anodize
  - Integral Color Anodize
  - Prime Coat
- Welded construction.
- Hinged frame.


## Ratings

**Free Area:** [48" × 48" (1222 × 1222) unit]: 3.9 ft<sup>2</sup> (0.36 m<sup>2</sup>)  
 24.4%

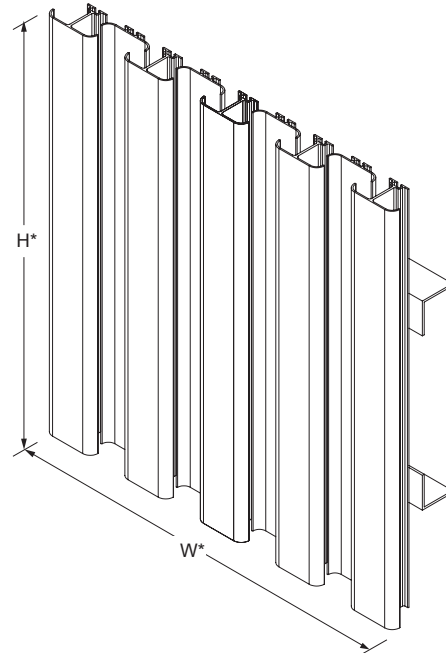


Model **VT-250**  
 (standard)


\*Dimensions furnished  
 approximately 1/2" (13) undersize.

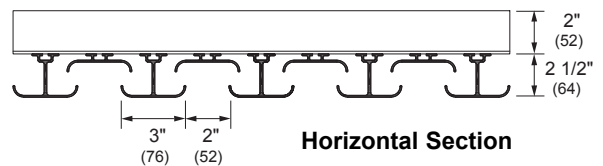

Horizontal Section



Vertical Mullion  
 (standard)

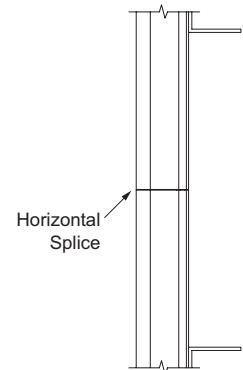

Horizontal Mullion  
 (standard)